

## Determination of the frequency dependent bulk modulus of liquids using a piezoelectric spherical shell

Christensen, Tage Emil; Olsen, Niels Boye

*Publication date:*  
1993

*Document Version*  
Publisher's PDF, also known as Version of record

*Citation for published version (APA):*  
Christensen, T. E., & Olsen, N. B. (1993). *Determination of the frequency dependent bulk modulus of liquids using a piezoelectric spherical shell*. Roskilde Universitet. <http://milne.ruc.dk/lmfufaTekster/>

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain.
- You may freely distribute the URL identifying the publication in the public portal.

### Take down policy

If you believe that this document breaches copyright please contact [rucforsk@kb.dk](mailto:rucforsk@kb.dk) providing details, and we will remove access to the work immediately and investigate your claim.

Determination of the Frequency Dependent

Bulk Modulus of Liquids

Using a Piezoelectric Spherical Shell

(Preprint)

T. Christensen and N. B. Olsen

IMFUFA, Roskilde University Center

**TEKSTER fra**

**IMFUFA**

**ROSKILDE UNIVERSITETSCENTER**  
INSTITUT FOR STUDIET AF MATEMATIK OG FYSIK SAMT DERES  
FUNKTIONER I UNDERVISNING, FORSKNING OG ANVENDELSER

IMFUFA, Roskilde Universitetscenter, Postboks 260, 4000 Roskilde

Determination of the Frequency Dependent Bulk Modulus of Liquids Using a Piezoelectric Spherical Shell

by: T. Christensen and N. B. Olsen

IMFUFA tekst nr. 256/93

19 pages

ISSN 0106-6242

---

Abstract.

Through the coupling between the electrical capacitance of a spherical piezoceramic shell and the mechanical stiffness of a liquid contained therein, the frequency dependent adiabatic bulk modulus  $K_g(\omega)$  of the liquid can be derived. Using this method,  $K_g(\omega)$  of glycerol in the range 15 Hz - 15 kHz has been measured at the glass transition. The loss peak frequencies of the compressibility  $\kappa_g(\omega) = K_g^{-1}(\omega)$  and the specific heat  $c_p(\omega)$  are found to be nearly equal .

PACS numbers: 64.70.Pf, 62.80.+f, 62.10.+s, 83.85.cg

Determination of the Frequency Dependent  
Bulk Modulus of Liquids  
Using a Piezoelectric Spherical Shell

T. Christensen and N. B. Olsen  
IMFUFA, Roskilde University Center

The elastic properties of an ideal isotropic elastic solid are characterized by two elastic constants, the shear modulus  $G$  and the bulk modulus  $K$ . Concerning the latter, the thermodynamic condition, isothermal ( $K_T$ ) or adiabatic ( $K_S$ ) should be stated. The viscous behaviour of an ideal Newtonian liquid is characterized by a shear viscosity  $\eta_0$ . Applying a harmonically varying shear strain with frequency  $f$  and cyclic frequency  $\omega=2\pi f$ , shear viscosity can be conceived as a frequency dependent shear modulus  $G=-i\omega\eta_0$ . Real liquids show both liquid and solid behaviour in their shear modulus. A simple phenomenological model reconciling these features is the Maxwell model [1]

$$G(\omega) = (G_\infty^{-1} + (-i\omega\eta_0)^{-1})^{-1} \quad (1)$$

showing solidlike behaviour at high frequencies ( $G \rightarrow G_\infty, \omega \rightarrow \infty$ ) and liquidlike behaviour at low frequencies ( $G \rightarrow -i\omega\eta_0, \omega \rightarrow 0$ ). The transition takes place at  $\omega_p = \tau_M^{-1}(T)$ , where  $\tau_M(T) = \eta_0/G_\infty$  is the Maxwell relaxation time. This is the characteristic phenomenon of the glass transition, and the glass transition temperature  $T_g$  in the Maxwell model is the temperature, where  $\tau_M(T_g)$  is equal to a characteristic experimental time scale or reciprocal frequency. The imaginary part of  $G$  has its maximum at the loss peak frequency  $\omega_p$ .

Real liquids cannot be described by a single relaxation time, since  $G(\omega)$  has a more complicated frequency dependence. Other properties like the specific heat [2],[3] and bulk modulus [4] also show relaxation. It is an important experimental and

theoretical task in the study of the glass transition to find connections between these properties. In this respect one should distinguish between relationships which stem from linear irreversible thermodynamics [5] and relations which depend on more specific models [6]. Let  $s$  be the entropy density,  $T$  the temperature,  $e_{ij}$  the strain tensor and  $\sigma_{ij}$  the stress tensor. Denote the relative volume change by  $e = \text{Tr}(e_{ij})$  and the hydrostatic pressure by  $p = -\frac{1}{3}\text{Tr}(\sigma_{ij})$ . Then one has

$$\begin{pmatrix} ds \\ de \end{pmatrix} = \begin{pmatrix} \frac{1}{T}c_p & \alpha_p \\ \alpha_p & \kappa_T \end{pmatrix} \begin{pmatrix} dT \\ -dp \end{pmatrix} = J \begin{pmatrix} dT \\ -dp \end{pmatrix} \quad (2)$$

where  $c_p$  is the isobaric specific heat,  $\alpha_p$  is the isobaric expansion coefficient and  $\kappa_T$  is the isothermal compressibility. These 3 quantities constitute the thermoelastic compliance matrix  $J$ . In equilibrium thermodynamics the symmetry of  $J$  is one of the Maxwell relations  $(\frac{\partial s}{\partial p})_T = -(\frac{\partial e}{\partial T})_p$ . The recipe of transferring to nonequilibrium thermodynamics for a relaxing medium is simply to let  $ds, de, dT, dp$  be the amplitudes of harmonically varying small perturbations  $\propto e^{-i\omega t}$ . Then  $c_p, \alpha_p, \kappa_T$  become complex, thereby describing the phase shift introduced by the relaxation processes. The symmetry of  $J$  still holds, but now it expresses an Onsager relation [5]. Thus, there are three independent complex thermoelastic response functions, which should be investigated. Experimentally related functions may be more

convenient to measure. The triple  $c_p, \alpha_p, \kappa_s$  would contain the same information since

$$\kappa_T(\omega) = \kappa_s(\omega) + \frac{T}{c_p(\omega)} \alpha_p^2(\omega) \quad (3)$$

which follows from interchanging the variables of (2). Thus (3) is as equally valid in linear nonequilibrium thermodynamics as in equilibrium thermodynamics. An example of a specific model is Zwanzigs [6] proposal that the isochoric specific heat  $c_v$  is frequency independent and that  $c_p(\omega)$  and  $\kappa_T(\omega)$  are related by

$$c_p(\omega) = c_v + (c_p(0) - c_v) \frac{\kappa_T(\omega)}{\kappa_T(0)} \quad (4)$$

A knowledge of three independent thermoelastic response functions could verify this model or give a clue to other models. The present work should be seen in this perspective.

We have developed a new method for measuring  $K_s(\omega)$  ( $= \kappa_s(\omega)^{-1}$ ) at low frequencies, i.e. frequencies at which the corresponding acoustic wavelength is much larger than the sample size (quasistatic regime). On the other the frequencies are sufficiently high to ensure adiabatic conditions, i.e. the corresponding thermal diffusion length is much smaller than the sample size.

Conventional methods [7] have to measure both the longitudinal,  $M$  and the shear,  $G$  modulus through the longitudinal,  $c_l$  and transversal,  $c_t$  sound velocity. The bulk

modulus is then given by the relation

$$M = K + \frac{4}{3}G \quad (5)$$

These methods demand high and discrete frequencies say 10 MHz in order that the corresponding wavelength is smaller than or comparable to the sample size.

Thus, we can in the present experiment obtain information on  $K_g(\omega)$  continuous in a frequency range not usually considered.

Furthermore, our method also determines  $M$  at certain resonance frequencies.

The method of McKinney, Edelman and Marvin [8] is a quasistatic method as ours. The principle of their method, however, is quite different, involving an inert liquid as pressure transferring agent and depending on both an emitter and receiver of acoustic vibrations. We have no separate emitter and receiver, only one transducer constituting the sample cell also. The measuring cell is a spherical shell of a piezoceramic material (pz26, Ferroperm, Denmark) polarized in radial direction. We will call it the piezoelectric bulk modulus gauge (PBG). It is covered with electrodes on the inner and outer surfaces. An insulated wire is put through the shell and connected to the inner electrode and another wire is connected to the outer electrode. On applying a potential difference across the shell, the PBG will expand or contract radially depending on the polarity. For a mechanical free outer surface, the coupling between the complex amplitudes of the normal stress  $\sigma$  and the volume change  $\Delta V$  respectively the surface charge  $Q$  and the potential difference  $U$  is given by a transfer matrix  $C_{ij}$



$$\begin{pmatrix} U \\ Q \end{pmatrix} = \begin{pmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{pmatrix} \begin{pmatrix} \sigma \\ \Delta V \end{pmatrix} \quad (6)$$

The measured electrical capacitance therefore depends on whether the shell is free to move ( $\sigma=0$ ) or clamped ( $\Delta V=0$ ),

$$C_{free}(\omega) = \frac{C_{22}}{C_{12}}, \quad C_{clamped}(\omega) = \frac{C_{21}}{C_{11}} \quad (7)$$

If a medium of stiffness  $S(\omega) = \frac{\sigma}{\Delta V}$  is placed inside the PBG, then

the electrical capacitance becomes

$$C(\omega) = \frac{C_{12} + C_{22}S}{C_{11} + C_{12}S} \quad (8)$$

Thus,  $S$  can be found knowing  $C_{ij}$  and measuring  $C(\omega)$ . The quantity  $\frac{C_{12}}{C_{11}}$

gives a characteristic stiffness where the PBG is most sensitive.

For a thin piezoelectric ceramic shell,  $C_{ij}$  can be expressed by

the inner radius  $r$ , thickness  $t$ , density  $\rho$ , elastic constants

$s_{11}, s_{12}$ , piezoelectric constant  $d_{13}$  and dielectric constant  $\epsilon_{33}$

[9]. Introducing the "breathing mode" resonance frequency

$$\omega_c = \frac{1}{r} \sqrt{\frac{2}{(s_{11} + s_{12})\rho}}, \quad \text{the planar coupling constant}$$

$$k_p = \sqrt{\frac{2d_{13}^2}{(s_{11} + s_{12})\epsilon_{33}}}, \quad \text{the free capacitance at zero frequency}$$

$$C_0 = C_f(0) = \frac{4\pi r^2}{t} \epsilon_{33} \quad \text{and the inertance } L = \rho \frac{t}{4\pi a^2}, \quad \text{the result is}$$

$$(C_{ij}) = \begin{pmatrix} \frac{1}{k_p \omega_c \sqrt{LC_0}} & \frac{\omega_c}{k_p} \sqrt{\frac{L}{C_0}} (1 - (\frac{\omega}{\omega_c})^2) \\ \frac{1-k_p^2}{k_p \omega_c} \sqrt{\frac{C_0}{L}} & \frac{\omega_c}{k_p} LC_0 (1 - (1-k_p^2) (\frac{\omega}{\omega_c})^2) \end{pmatrix} \quad (9)$$

In the specific case  $\rho = 7.65 \text{ gcm}^{-3}$ ,  $t = 0.10 \text{ cm}$ ,  $r = 0.90 \text{ cm}$ , whereby  $L = 7.52 \cdot 10^{-2} \text{ gcm}^{-4}$ . By fitting a measurement of the free electrical capacitance to the theoretical expression

$$C_{free}(\omega) = \frac{C_{22}}{C_{12}} = C_0 \frac{1 - (1-k_p^2) (\frac{\omega}{\omega_c})^2}{1 - (\frac{\omega}{\omega_c})^2} \quad (10)$$

the three constants  $C_0, k_p, \omega_c$  are found (see fig. 1). These constants are both temperature and weakly time dependent due to annealing processes in the piezoceramic itself. Thus the same time and temperature scheme is exactly followed during reference measurement and modulus measurement. Typical values are  $C_0 = 12 \text{ nF}$ ,  $k_p = 0.51$ ,

$f_k = \frac{\omega_c}{2\pi} = 85 \text{ kHz}$ . One has to correct the expression (9) for the

transfer matrix taking the finite thickness of the transducer into account. We have indeed calculated and used the general transfer matrix, but these lengthy expressions are omitted here. The corrections amounts to 15% on  $K_g$ .

At the top of the sphere a small hole of radius  $r_h$  makes it possible to fill the sphere with liquid. Also, a reservoir of liquid resides in a small tube on top of the sphere. The hole connects this to the inside of the sphere, allowing for thermal expansion of the liquid. Despite this hole, the liquid is

virtually confined in the sphere at the frequencies of interest: Assuming Poiseuille flow through the hole, a characteristic flow time  $\tau_f$  will be

$$\tau_f = \frac{32}{3} \frac{r^3 t}{r_h^4} \frac{\eta}{K} \approx 10^5 \tau_M \quad (11)$$

Thus, one has in fact quite a large range of times beyond the Maxwell relaxation time at disposal. On the other hand, the cell can of course only be filled in a reasonably time at high temperatures where the viscosity is low.

The stiffness  $S(\omega)$  of a spherical isotropic viscoelastic solid is derivable from the solution of the equation of motion [10]. If the density is  $\rho_1$ , the longitudinal wavevector

$k_1 = \sqrt{\frac{\rho_1}{M}} \omega$  and the volume  $V = \frac{4}{3} \pi r^3$  then one finds

$$S(\omega) = \frac{1}{V} \left\{ K - M \left( 1 + \frac{1}{3} \frac{(k_1 r)^2 \sin(k_1 r)}{k_1 r \cos(k_1 r) - \sin(k_1 r)} \right) \right\} \quad (12)$$

At low frequencies  $S(\omega)$  is simply  $\frac{K_s(\omega)}{V}$ . At higher frequencies

it depends on both  $K(\omega)$  and  $M(\omega)$  because longitudinal waves are excited.

The new method was applied to that canonical example of the glass transition, glycerol. Fig. 2 shows how the electrical capacitance  $C(\omega)$  of the PBG is reduced from its free value by the partial clamping of the transducer due to the contained liquid. The glass transition in this picture is seen indirectly in the decrease of  $C$

with increasing frequency. Also shown is the measured  $C_{free}$  and the calculated  $C_{clamped}$ .

Fig. 3 and 4 presents the measured real and imaginary part of bulk modulus  $K_s$  as a function of frequency at different temperatures. Denote the relaxational part  $K_s(\omega) - K_s(0)$  by  $K_r(\omega)$ . The solid line represents a fit to data of a phenomenological model, where  $K_r(\omega)$  is given by an extended Maxwell model  $K_r(\omega) = K_r(\infty) (1 + (-i\omega\tau_b)^{-1} + q(-i\omega\tau_b)^{-\alpha})^{-1}$ . It is found that  $q = 1.40$  and  $\alpha = 0.43$ .  $\tau_b$  is temperature dependent and corresponds to the Maxwell relaxation time.

The logarithm of the loss peak frequency  $f_p$  of the compressibility as a function of the reciprocal temperature is shown in fig. 5.  $f_p$  has been fitted to  $f_p = f_0 \exp(-(\frac{T_0}{T})^3)$  finding

$f_0 = 6.67 \cdot 10^{12} \text{ Hz}$  and  $T_0 = 612 \text{ K}$ .  $\tau_b$  is  $0.126 f_p^{-1}$  in the fitting model for the present values of  $q$  and  $\alpha$ . The figure shows, that the loss peak frequency of the specific heat  $c_p(\omega)$  earlier measured [3] is almost the same as the loss peak frequency of  $\kappa_s(\omega)$  if extrapolated down in temperature. This would also be expected for a comprehensive model of the thermoviscoelastic properties of the liquid. The expression (4) predicts equality of the loss peak frequencies of  $c_p(\omega)$  and  $\kappa_T(\omega)$  but not necessarily of  $\kappa_s(\omega)$ .

The real and imaginary part of the specific stiffness  $S(\omega)V$  of the liquid sphere as a function of temperature at 1 kHz is shown in fig. 6. Two dispersion regions are seen with maxima in the

imaginary part at 214 K and 268 K respectively. The low temperature dispersion region is simply the glass transition in  $K_g$ , since at this frequency the measured specific stiffness (12) is equal to bulk modulus. At higher temperature the liquid is able to flow through the filling hole and this gives rise to the second dispersion region. Therefore although the measured stiffness still reflects relaxation processes at the glass transition, it does not give bulk modulus and cannot easily be analyzed in a rigorous way. The ratio of  $f_p$  at 214 K and 268 K is  $10^5$ , which is in agreement with the estimate (11).

According to (12) a viscoelastic sphere will show stiffness resonances when  $\tan(k_1 r) = k_1 r$ . These resonances are seen in the electrical capacitance of the PBG. Although the resonances are moved due to the mechanical coupling of the PBG and the liquid, this is only of importance for the lowest lying resonances. Thus for resonance frequency  $\nu_n$ ,  $n \geq 3$  the condition simply gives longitudinal modulus to a good approximation as  $16(1+2n)^{-2} \rho_l \nu_n^2 r^2$ .

In fig. 6  $M$  calculated by the third resonance at 280-320 K is shown. At these temperatures the inverse Maxwell relaxation time is much higher than the resonance frequency. Thus shear modulus can be neglected compared to bulk modulus and (5) reduces to  $M_0 = K_0$ , where index 0 means the low frequency limit. The extrapolation of  $K_0(T)$  measured by this resonance technique into the temperature region, where the quasistatic method works, agrees within 1%. In this way one has an independent and simple check on the validity of the procedure of the quasistatic method.

In conclusion, the main benefits of the method are the following. The transducer converts a mechanical impedance to an electrical impedance, which is convenient to measure. The small transducer is handy to place in a cryostat and reach thermal equilibrium in a reasonable time. The spherical symmetry makes it possible to calculate the stiffness of the liquid and the transfer matrix of the transducer analytically. Finally the transducer can operate in two modes, quasistatic and resonance. The results obtained for glycerol points towards a related relaxation of  $\kappa_s(\omega)$  and  $c_p(\omega)$ . The development however of a method of measuring  $\alpha_p(\omega)$  will be necessary to get full information of the thermoelastic properties of liquids at the glass transition.

References.

1. L.D.Landau and E.M.Lifshitz, *Course of Theoretical Physics Vol 7, Theory of Elasticity* 3.ed(1986),142-143
2. N. O. Birge and S. R. Nagel, *Phys. Rev. Lett.* 54, 2674 (1985)
3. T. Christensen, *J. Phys. (Paris) Colloq.* 46 C8-635 (1985)
4. R. Piccirelli, T. A. Litovitz, *J. Acoust. Soc. Am.* 29, 1009 (1957)
5. J. Meixner and H. G. Reik, *Thermodynamik der irreversiblen Prozesse, Handbuch der Physik vol 3/2* edited by S. Flugge (Springer,1959),p. 482-485
6. R. Zwanzig, *J. Chem. Phys.* 88, 5831 (1988)
7. G. Harrison, *The Dynamic Properties of Supercooled Liquids* (Academic Press, London, 1976)
8. J. E. McKinney, S. Edelman and R. S. Marvin, *J. Appl. Phys* 27, 425, (1956)
9. D. A. Berlincourt, D. R. Curran and H. Jaffe, *Piezoelectric and Piezomagnetic Materials and Their Function in Transducers*, in *Physical Acoustics Vol. I A*, Editor W. P. Mason (Academic Press, 1964), p. 224
10. Reference 1 p.87-91

Figure captions.

Fig.1. The first resonance (breathing mode) of the piezoceramic shell without liquid at 210 K ( ° ). The solid line is fit of data to equation (10).

Fig.2. The electrical capacitance of the PBG filled with glycerol at 210 K ( ° ). Upper solid line is  $C_{free}$ . Lower solid line is  $C_{clamped}$ .

Fig.3. The real part of bulk modulus of glycerol at the glass transition as a function of frequency at different temperatures. Solid line is fit to an extended Maxwell model.

Fig.4. The imaginary part of bulk modulus corresponding to the real part shown in fig.3.

Fig.5. The logarithm of the loss peak frequency of the compressibility ( ° ) and of the specific heat ( ° ).

Fig.6. Real ( ° ) and imaginary ( ° ) parts of the specific stiffness at 1 kHz measured by the quasistatic method.  $K_0$  ( ° ) measured by the resonance method.



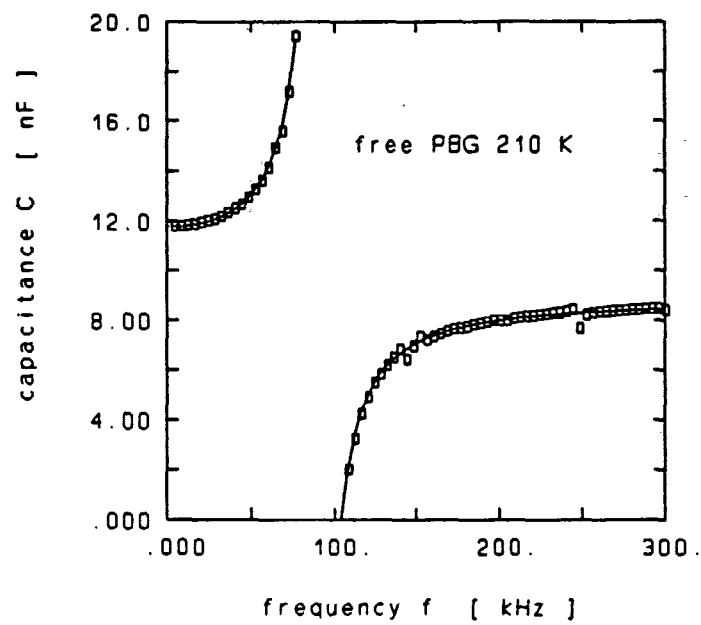


Figure 1.

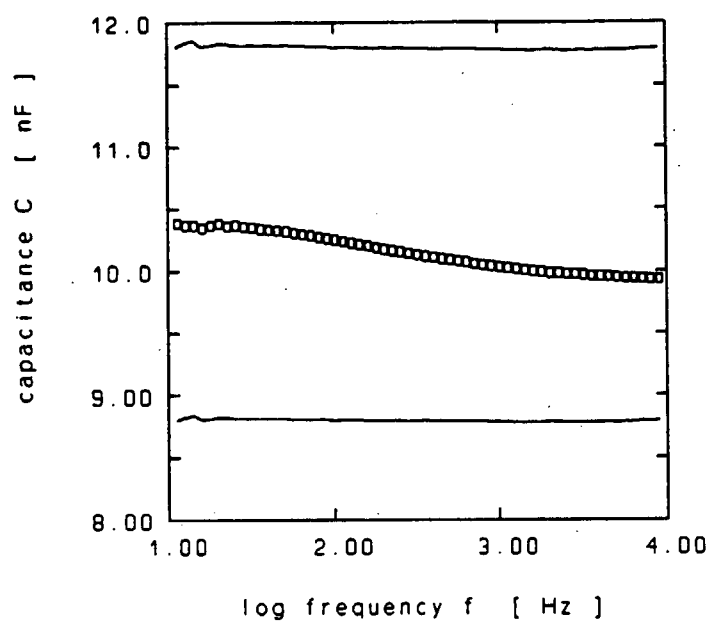


Figure 2.

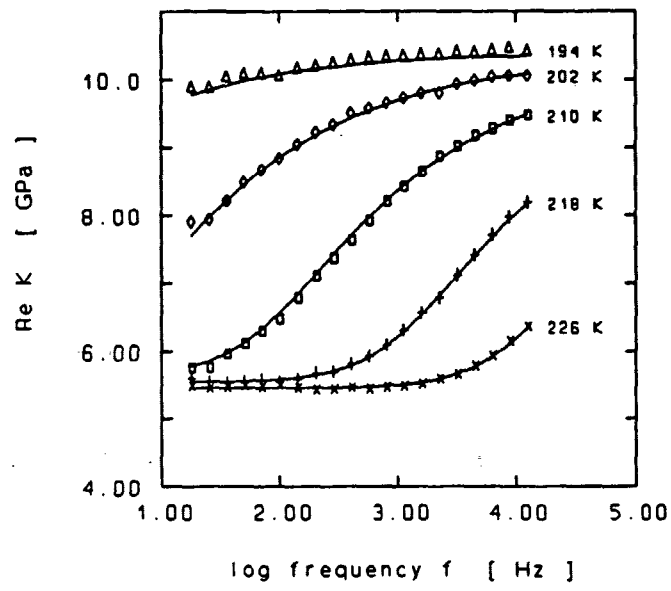


Figure 3.

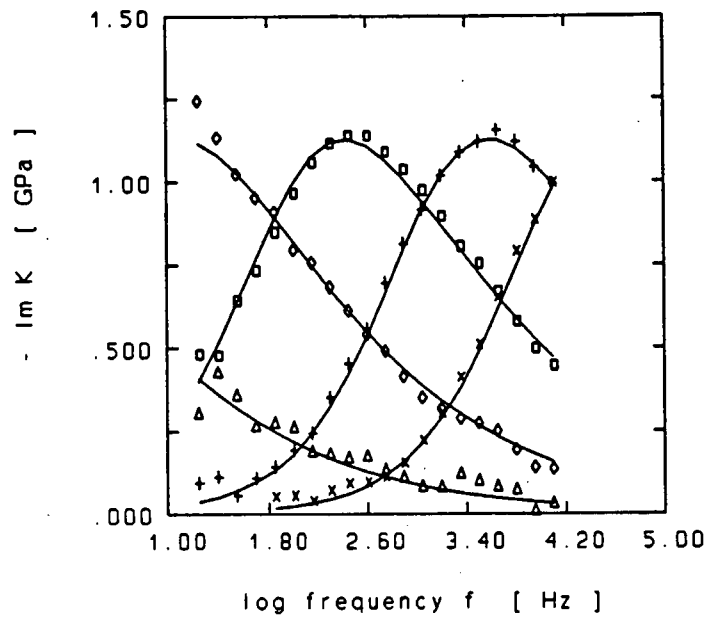


Figure 4.

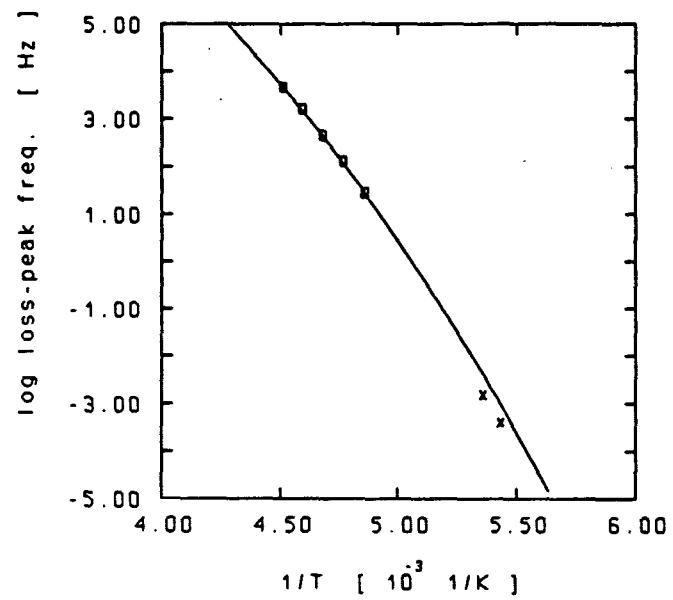


Figure 5.

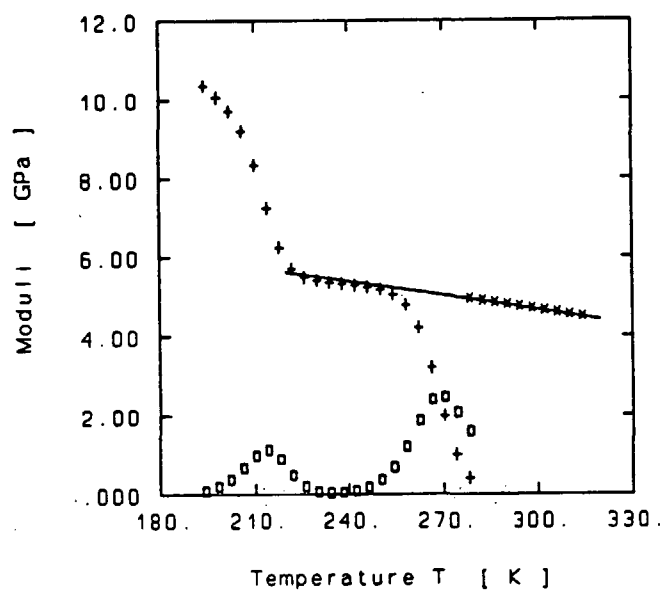


Figure 6.

Liste over tidligere udkomne tekster  
tilsendes gerne. Henvendelse herom kan  
ske til IMFUFA's sekretariat  
tlf. 46 75 77 11 lokal 2263

217/92 "Two papers on APPLICATIONS AND MODELLING  
IN THE MATHEMATICS CURRICULUM"

by: Mogens Niss

218/92 "A Three-Square Theorem"

by: Lars Kadison

219/92 "RUPNOK - stationær strømning i elastiske rør"

af: Anja Boisen, Karen Birkelund, Mette Olufsen

Vejleder: Jesper Larsen

220/92 "Automatisk diagnosticering i digitale kredsløb"

af: Bjørn Christensen, Ole Møller Nielsen

Vejleder: Stig Andur Pedersen

221/92 "A BUNDLE VALUED RADON TRANSFORM, WITH  
APPLICATIONS TO INVARIANT WAVE EQUATIONS"

by: Thomas P. Branson, Gestur Olafsson and  
Henrik Schlichtkrull

222/92 On the Representations of some Infinite Dimensional  
Groups and Algebras Related to Quantum Physics

by: Johnny T. Ottesen

223/92 THE FUNCTIONAL DETERMINANT

by: Thomas P. Branson

224/92 UNIVERSAL AC CONDUCTIVITY OF NON-METALLIC SOLIDS AT  
LOW TEMPERATURES

by: Jeppe C. Dyre

225/92 "HATMODELLEN" Impedansspektroskopi i ultrarent  
en-krystallinsk silicium

af: Anja Boisen, Anders Gorm Larsen, Jesper Varmer,  
Johannes K. Nielsen, Kit R. Hansen, Peter Bøggild  
og Thomas Hougaard

Vejleder: Petr Viscor

226/92 "METHODS AND MODELS FOR ESTIMATING THE GLOBAL  
CIRCULATION OF SELECTED EMISSIONS FROM ENERGY  
CONVERSION"

by: Bent Sørensen

227/92 "Computersimulering og fysik"

af: Per M. Hansen, Steffen Holm,  
Peter Maibom, Mads K. Dall Petersen,  
Pernille Postgaard, Thomas B. Schrøder,  
Ivar P. Zeck

Vejleder: Peder Voetmann Christiansen

228/92 "Teknologi og historie"

Fire artikler af:

Mogens Niss, Jens Høyrup, Ib Thiersen,  
Hans Heddal

229/92 "Masser af information uden betydning"

En diskussion af informationsteorien  
i Tor Nørretranders' "Mærk Verden" og  
en skitse til et alternativ baseret  
på andenordens kybernetik og semiotik.

af: Søren Brier

230/92 "Vinklens tredeling - et klassisk  
problem"

et matematisk projekt af

Karen Birkelund, Bjørn Christensen

Vejleder: Johnny Ottesen

231A/92 "Elektrondiffusion i silicium - en  
matematisk model"

af: Jesper Voetmann, Karen Birkelund,  
Mette Olufsen, Ole Møller Nielsen

Vejledere: Johnny Ottesen, H.B. Hansen

231B/92 "Elektrondiffusion i silicium - en  
matematisk model" Kildetekster

af: Jesper Voetmann, Karen Birkelund,  
Mette Olufsen, Ole Møller Nielsen

Vejledere: Johnny Ottesen, H.B. Hansen

232/92 "Undersøgelse om den simultane opdagelse  
af energiens bevarelse og isærdeles om  
de af Mayer, Colding, Joule og Helmholtz  
udførte arbejder"

af: L. Arleth, G.I. Dybkjær, M.T. Østergård

Vejleder: Dorthe Posselt

233/92 "The effect of age-dependent host  
mortality on the dynamics of an endemic  
disease and  
Instability in an SIR-model with age-  
dependent susceptibility

by: Viggo Andreasen

234/92 "THE FUNCTIONAL DETERMINANT OF A FOUR-DIMENSIONAL  
BOUNDARY VALUE PROBLEM"

by: Thomas P. Branson and Peter B. Gilkey

235/92 OVERFLADESTRUKTUR OG POREUDVIKLING AF KOKS

- Modul 3 fysik projekt -

af: Thomas Jessen

- 236a/93 INTRODUKTION TIL KVANTE  
HALL EFFEKTEN  
af: Anja Boisen, Peter Bøggild  
Vejleder: Peder Voetmann Christiansen  
Erland Brun Hansen
- 236b/93 STRØMSSAMMENBRUD AF KVANTE  
HALL EFFEKTEN  
af: Anja Boisen, Peter Bøggild  
Vejleder: Peder Voetmann Christiansen  
Erland Brun Hansen
- 237/93 The Wedderburn principal theorem and  
Shukla cohomology  
af: Lars Kadison
- 238/93 SEMIOTIK OG SYSTEMEGENSKABER (2)  
Vektorbånd og tensorer  
af: Peder Voetmann Christiansen
- 239/93 Valgsystemer - Modelbygning og analyse  
Matematik 2. modul  
af: Charlotte Gjerrild, Jane Hansen,  
Maria Hermannsson, Allan Jørgensen,  
Ragna Clauson-Kaas, Poul Lützen  
Vejleder: Mogens Niss
- 240/93 Patologiske eksempler.  
Om sære matematiske fæns betydning for  
den matematiske udvikling  
af: Claus Dræby, Jørn Skov Hansen, Runa  
Ulsøe Johansen, Peter Meibom, Johannes  
Kristoffer Nielsen  
Vejleder: Mogens Niss
- 241/93 FOTOVOLTAISK STATUSNOTAT 1  
af: Bent Sørensen
- 242/93 Brovedligholdelse - bevar mig vel  
Analyse af Vejdirektoratets model for  
optimering af broreparationer  
af: Linda Kyndlev, Kare Fundal, Kamma  
Tulinius, Ivar Zeck  
Vejleder: Jesper Larsen
- 243/93 TANKEEKSPERIMENTER I FYSIKKEN  
Et 1.modul fysikprojekt  
af: Karen Birkelund, Stine Sofia Korremann  
Vejleder: Dorthe Posselt
- 244/93 RADONTRANSFORMATIONEN og dens anvendelse  
i CT-scanning  
Projektrapport  
af: Trine Andreassen, Tine Guldager Christiansen,  
Nina Skov Hansen og Christine Iversen  
Vejledere: Gestur Olafsson og Jesper Larsen
- 245a+b  
/93 Time-Of-Flight målinger på krystallinske  
halvledere  
Specialerapport  
af: Linda Szkotak Jensen og Lise Odgaard Gade  
Vejledere: Petr Viscor og Niels Boye Olsen
- 246/93 HVERDAGSVIDEN OG MATEMATIK  
- LÆREPROCESSER I SKOLEN  
af: Lena Lindenskov, Statens Humanistiske  
Forskningsråd, RUC, IMFUFA
- 247/93 UNIVERSAL LOW TEMPERATURE AC CON-  
DUCTIVITY OF MACROSCOPICALLY  
DISORDERED NON-METALS  
by: Jeppe C. Dyre
- 248/93 DIRAC OPERATORS AND MANIFOLDS WITH  
BOUNDARY  
by: B. Booss-Bavnbek, K.P.Wojciechowski
- 249/93 Perspectives on Teichmüller and the  
Jahresbericht Addendum to Schappacher,  
Scholz, et al.  
by: B. Booss-Bavnbek  
With comments by W.Abikoff, L.Ahlfors,  
J.Cerf, P.J.Davis, W.Fuchs, F.P.Gardiner,  
J.Jost, J.-P.Kahane, R.Lohan, L.Lorch,  
J.Radkau and T.Söderqvist
- 250/93 EULER OG BOLZANO - MATEMATISK ANALYSE SET I ET  
VIDENSKABSTEORETISK PERSPEKTIV  
Projektrapport af: Anja Juul, Lone Michelsen,  
Tomas Højgård Jensen  
Vejleder: Stig Andur Pedersen
- 251/93 Genotypic Proportions in Hybrid Zones  
by: Freddy Bugge Christiansen, Viggo Andreassen  
and Ebbe Thue Poulsen
- 252/93 MODELLERING AF TILFÆLDIGE FÆNOMENER  
Projektrapport af: Birthe Friis, Lisbeth Helmgård,  
Kristina Charlotte Jakobsen, Marina Mosbæk  
Johannessen, Lotte Ludvigsen, Mette Bass Nielsen
- 253/93 Kuglepakning  
Teori og model  
af: Lise Arleth, Kåre Fundal, Nils Kruse  
Vejleder: Mogens Niss
- 254/93 Regressionsanalyse  
Materiale til et statistikkursus  
af: Jørgen Larsen
- 255/93 TID & BETINGET UAFHÆNGIGHED  
af: Peter Barremoës